

# Optimised Cycle Storage Layout - Plan


90 bike system with 90 integrated cycle specific lockers

157CHLN\_Chancery Lane\_004

19/09/14

## Summary:

68 ACCP\_Corporate Base Units with  
68 ACCP\_Corporate Lockers above  
22 ACCP\_Vertical  
22 Corporate\_Lockers

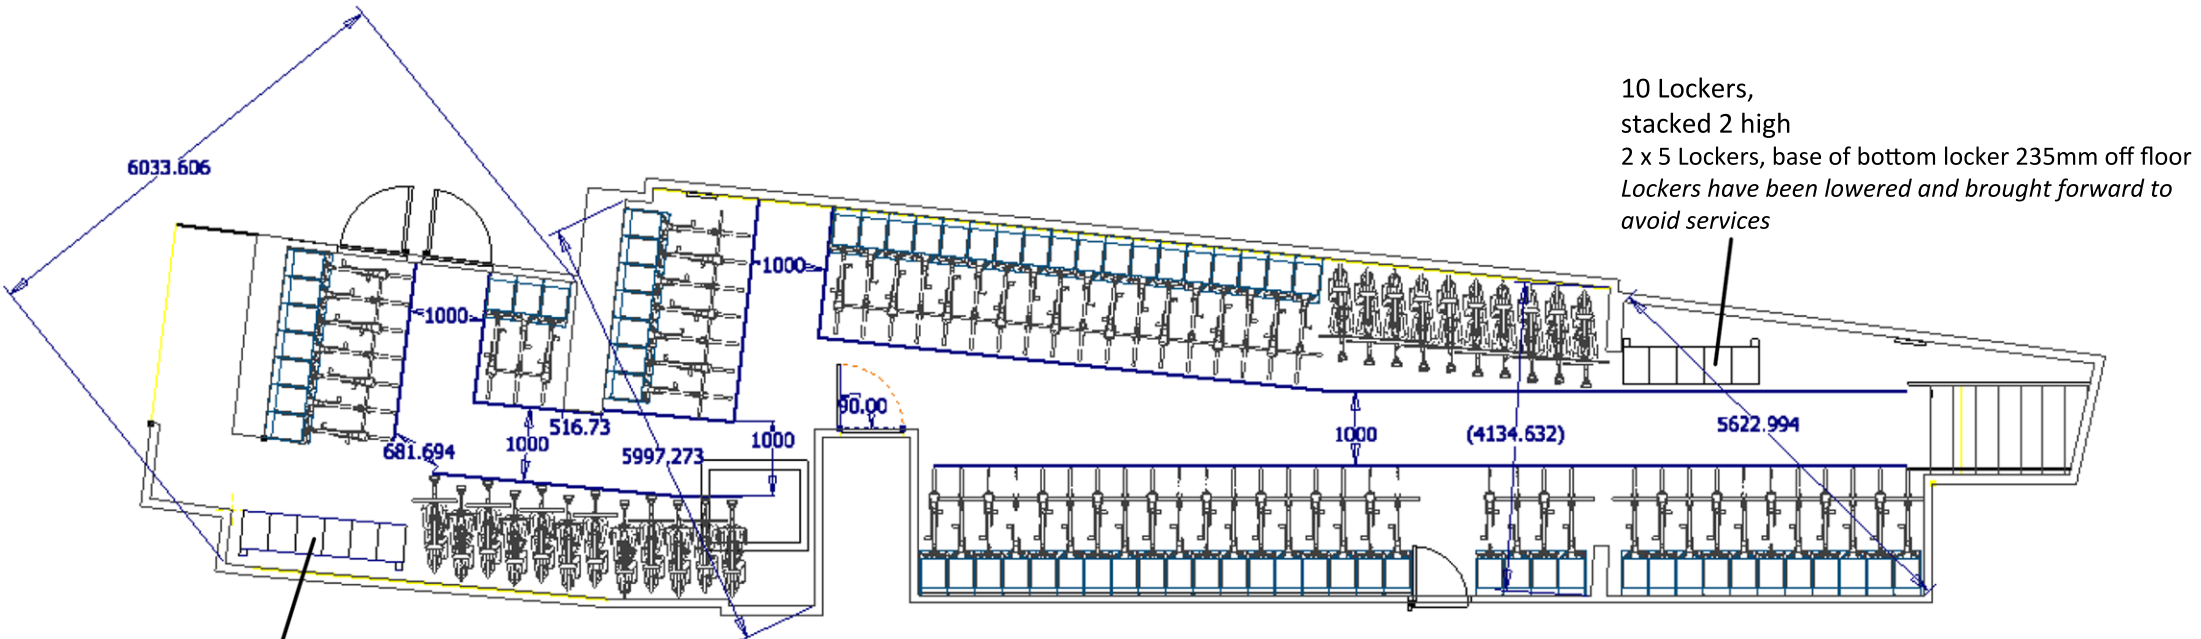

12 Lockers,  
stacked 2 high  
2 x 6 Lockers, base of bottom locker 275mm off floor  
*Lockers have been lowered and brought forward to avoid services*

10 Lockers,  
stacked 2 high  
2 x 5 Lockers, base of bottom locker 235mm off floor  
*Lockers have been lowered and brought forward to avoid services*

- N.B.
1. All ACCP\_Corp and ACCP\_Vert assumed to be floor fixed into concrete
  2. 12 Corporate\_Lockers next to shower room entrance assumed to be hung on frame that is mounted to floor
  3. 10 Corporate\_Lockers next to stairs assumed to be hung on frame that is mounted to floor

